

Y6-41 系列 锅炉 引 风 机 Y6-41 Series centrifugal fan for boiler using

本产品是蒸发量0.5-10t/h的各类工业锅炉的引风机。有左旋和右旋两种型式，均为单吸入。出风口位置“左”、“右”均可制成0°、90°、180°、270°四种角度。


This product is an induced draught fan used for various boilers with 0.5~10 tons per hour steam output. It has left & right rotation two patterns with single suction. The left and right positions of the air outlet can be made into 0°, 90°, 180°, 270° four angles.

性能参数 Performance

机号 Fan Number №	转速 Rotation Speed rpm	配用电机 Motor kW-p	流量 Volume Flow m³/h	全压 Total Pressure Pa
3.55C	2950	1.5-2	2962~841	588~1448
4C	3450	3-2	3996~1355	1893~2676
4.5C	2925	4-2	4970~2317	1667~2327
	3250	5.5-2	5522~2574	2058~2873
5.4C	2600	7.5-2	7980~3900	2002~2604
	2900	11-2	8901~4350	2491~3240



外形及安装尺寸 Dimensions

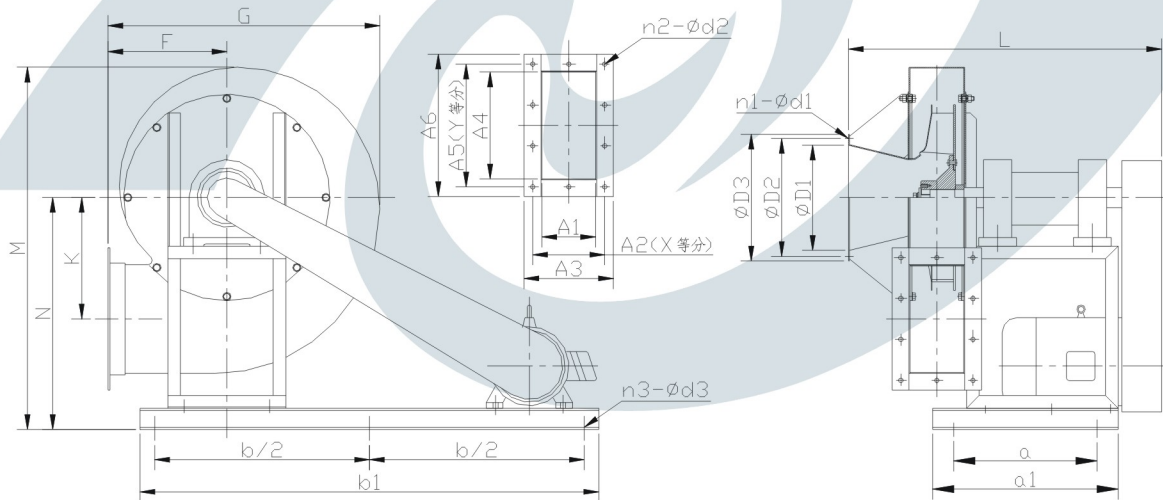

机号 Fan Number №	进 风 口 Inlet					出 风 口 Outlet										外形与安装尺寸 Dimensions					
	D1	D2	D3	n1	d1	A1	A2	X	A3	A4	A5	Y	A6	n2	d2	G	M	L	N	K	F
3.55C	219	255	285	8	7	114	150	2	180	226	262	3	292	10	10	571	714	661	430	253	244
4C	240	280	310	8	7	128	164	2	194	254	290	3	320	10	10	643	820	747	500	285	274
4.5C	277	315	345	8	7	144	180	2	210	286	322	3	352	10	10	723	885	784	525	321	309
5.4C	334	370	400	12	10	174	210	2	240	343	380	3	410	10	13	868	980	951	550	385	369